
# DREAMING

## PORCELAIN
## PORCELAINE



| | | 30x60 | 60x60 | 75x75 |
|---|---|---|---|---|
| **Passion Pulpis** | velvet | | ■ | |
| | polished | | | |
| **Crystal White** | velvet | | ■ | |
| | polished | | | |
| **Romance Safari** | velvet | | ■ | |
| | polished | | | |
| **Grey Temptation** | velvet | | | |
| | polished | | | |
| packaging (pieces per box) | | 8 | 4 | 2 |

| test | standard | req'd value | test result |
|---|---|---|---|
| usage | | | high traffic |
| pre-consumer recycled content | | | >=40% |
| thickness | | | 10mm (11mm 75x75) |
| dimensions | iso 10545-2 | various | conforms |
| | astm C485,499 | various | conforms |
| water absorption | iso 10545-3 | <0.5% | conforms |
| | astm C373 | <0.5% | conforms |
| bending strength | iso 10545-4 | >=35N/mm² | conforms |
| breaking strength | iso 10545-4 | >1300N | conforms |
| | astm C648 | >=250lbs | conforms |
| surface abrasion resistance | iso 10545-7 | | pei 5 (pol. pei 4) |
| linear thermal expansion | iso 10545-8 | | conforms |
| | astm C372 | | conforms |
| thermal shock resistance | iso 10545-9 | | resistant |
| | astm C484 | | resistant |
| crazing resistance | iso 10545-9 | | resistant |
| frost resistance | iso 10545-12 | | resistant |
| | astm C1026 | | resistant |
| chemical resistance | iso 10545-13 | | ga, gla-gha |
| | astm C650 | | resistant |
| stain resistance | iso 10545-14 | | resistant |
| | cti 81-7 | | resistant |
| slip resitance (velvet) | ASTM C1028 | wet: >0.60<br>dry: >0.60 | wet: >0.66<br>dry: >0.89 |

1. When installing rectangular tiles in a staggered, brick layout, do not stagger the long side more than 1/3 of the length of the tile.
2. Joints of at least 2mm are recommended when installing rectified tiles and a minimum of 4mm for unrectified tiles.
3. These samples are for general reference only. Variations in dimension, veining, shade and colour may occur. Please do not remove samples from board. If full-size or loose samples are required, or to check stock quantity, exact size or thickness contact Stone Tile or your sales rep.
4. Sizes noted are nominal and metric.
5. Special Order items may require a minimum order quantity.

stock item ■ □ special order (allow 6-8 wks)

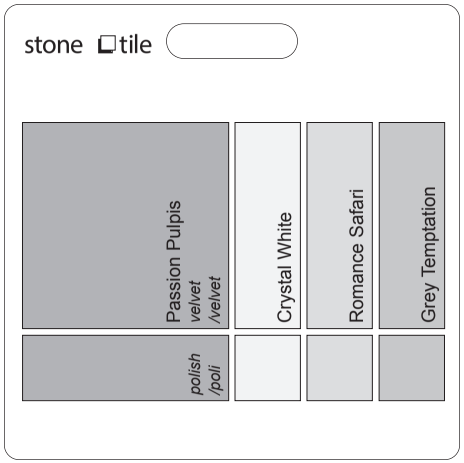



image of sample board face/*l'image de la façade du panneau*

**Dreaming** is manufactured in Italy by **Lea Ceramiche.**

| trims & decors available | |
|---|---|
| gradino (velvet & pol) | 60x60 |
| battiscopa (velvet & pol) | 10x60 |

**Dreaming** est fabriqué en Italie par **Lea Ceramiche.**


| spéciales disponibles | |
|---|---|
| gradino (velvet & pol) | 60x60 |
| battiscopa (velvet & pol) | 10x60 |

EU Ecolabel www.ecolabel.eu

LEED COMPLIANT

**www.stone-tile.com**

| vancouver | calgary | toronto | montreal | new york |
|---|---|---|---|---|
| 604-731-9948 | 403-234-7274 | 416-515-9000 | 514-903-9026 | 866-669-1103 |



| | | 30x60 | 60x60 | 75x75 |
|---|---|---|---|---|
| **Passion Pulpis** | velvet | | ■ | |
| | poli | | | |
| **Crystal White** | velvet | | ■ | |
| | poli | | | |
| **Romance Safari** | velvet | | ■ | |
| | poli | | | |
| **Grey Temptation** | velvet | | | |
| | poli | | | |
| emballage (pièces/boîte) | | 8 | 4 | 2 |

| test | standard | req'd value | test result |
|---|---|---|---|
| utilisation | | | fort trafic |
| pre-consumer recycled content | | | >=40% |
| épaisseur | | | 10mm (11mm 75x75) |
| dimensions | iso 10545-2 | diverses | conforme |
| | astm C485,499 | diverses | conforme |
| absorption d'eau | iso 10545-3 | <0.5% | conforme |
| | astm C373 | <0.5% | conforme |
| résistance à la flexion | iso 10545-4 | >=35N/mm² | conforme |
| chargement de rupture | iso 10545-4 | >1300N | conforme |
| | astm C648 | >=250lbs | conforme |
| résistance à l'abrasionsuperficielle | iso 10545-7 | | pei 5 (pol. pei 4) |
| dilatation thermique linéaire | iso 10545-8 | | conforme |
| | astm C372 | | conforme |
| résistance aux chocs thermiques | iso 10545-9 | | résistant |
| | astm C484 | | résistant |
| résistance au tressilage | iso 10545-9 | | résistant |
| résistance au gel | iso 10545-12 | | résistant |
| | astm C1026 | | résistant |
| résistance chimique | iso 10545-13 | | ga, gla-gha |
| | astm C650 | | résistant |
| résistance aux taches | iso 10545-14 | | résistant |
| | cti 81-7 | | résistant |
| résistance au glissement (velvet) | ASTM C1028 | humides: >0.60<br>sec: >0.60 | humides: >0.66<br>sec: >0.89 |

1. Lors de l'installation des carreaux rectangulaires dans une mise en brique ne pas décaler le côté long de plus de 1/3 de la longueur de la dalle.
2. Joints d'au moins 2 mm sont recommandées lors de l'installation de carreaux rectifiés et un minimum de 4 mm pour les carreaux non rectifiés.
3. Ces échantillons sont à titre indicatif seulement. Tonalité, texture, dimension et couleur peuvent varier. Pour vérifier les details et les quantités en stock, veuillez contacter Stone Tile ou votre représentant. S'il vous plaît ne pas detacher les échantillons du panneau.
4. Les tailles sont nominales et métriques.
5. Articles en commande spéciale peuvent nécessiter une quantité minimum de commande.

article en stock ■ □ commande spéciale (délai de 6-8 semaines)