
MUTINA

Rings
by Michael Anastassiades

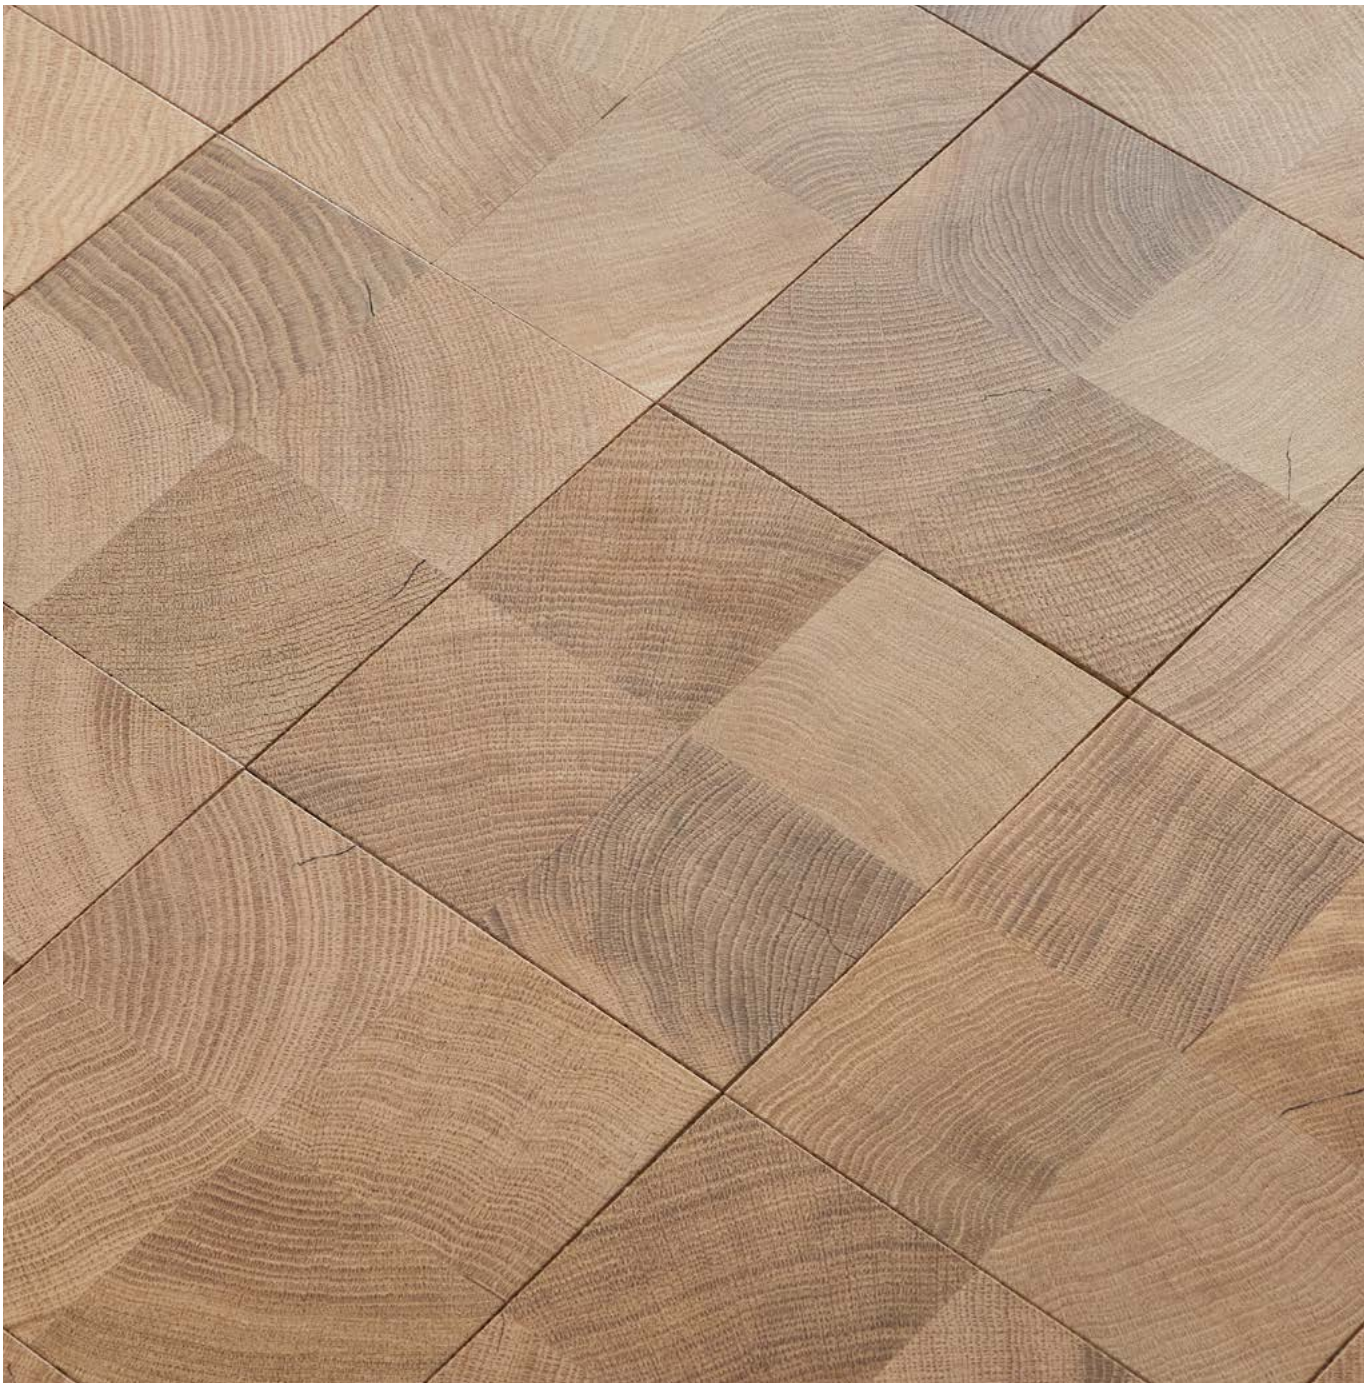

EN

General information
Laying and maintenance tips
Colors
Technical features
Packing

Ceramiche Mutina Spa


Via del Crociale 25 41042 Fiorano Modenese, Italia
T +39 0536812800 F +39 0536812808
info@mutina.it – www.mutina.it


Contract Division
arch@mutina.it




General information

collection	Rings
design	Michael Anastassiades, 2024
production	Artisanal
material	Natural oak wood with water-based varnish Two-layer technology parquet with a 4 mm top layer of noble oak wood and a birch plywood backing with cross-laminated fibers (total thickness 15 mm).
thickness	15 mm
nominal size	17,5 x 17,5 cm (6,9”· 6,9”); Brass: brass insert size 1x5 cm
specification	– 2 textures: Plain, Brass (with brass insert) The modules are rated with an innovative embossing process. The painting treatment of the entire strip is made with a water-based single-component.
use	Indoor - floor/wall, residential/public.







Colours



Plain



Brass

Laying and maintenance tips

use	Floors & walls – indoor
storage	The product must be stored in its intact packaging, in a dry, ventilated place.
installation and instalaltion environment	The product must be installed after the installation of door and window frames, and once plaster is completely dry. To be considered suitable, the environment must have between 45% and 60% humidity and a temperature in the 10°C - 25°C range. The maximum humidity of the substrate will vary depending on the type (max. 2% for concrete screed, 1.7% for underfloor heating screed and 0.5% for anhydrous screed). The humidity of the substrate must be measured using a carbide hygrometer. In compliance with the UNI 11265 Standard, the installer must verify the suitability of the installation environment. Before installation, the humidity content of the parquet must be measured to ensure it does not exceed 9±2% (neither lower nor higher). Assembly must be carried out by qualified operators.
recommended adhesive	Two-component, epoxy-polyurethane adhesive for laying parquet flooring, such as Mapei's ULTRABOND P913 2K PLUS or an equivalent product.
usage conditions	Wood is a natural material, so it tends to balance its humidity content with that of the environment. It is important to avoid sudden changes in temperature and humidity. Air humidity must be between 45% and 60%, and temperature between 18°C and 25°C. Use sprayers to maintain humidity at the levels indicated.
wood types	RINGS is a square tile made of natural oak, where a special technique called "cross-cutting" highlights the wood's growth rings, making them a defining feature of its visual appeal. Natural wood floors may exhibit variations in shape, colour and texture, which are distinctive traits that reflect its handcrafted nature. Differences between one tile and another, or even within the same tile, are not imperfections but rather expressions of the material's natural uniqueness and the craftsmanship behind it. With the "cross-cutting" technique, where the wood fibres are cut crosswise, small cracks (or splits) may occur before, during or after installation. This is a natural and statistically unavoidable phenomenon caused by the interaction between the wood and its environment, including fluctuations in humidity, temperature and light. Wood is, after all, a living, dynamic material, subject to change over time, even with normal use. These characteristics are a testament to the product's authenticity, which is crafted with full respect for the inherent qualities of the raw material. As a natural material, each wooden element is unique and cannot be replicated. Samples and promotional images are purely illustrative and cannot fully represent the complete range of possible colour and structural variations in the finished product. Over time, exposure to sunlight typically causes the wood's colour to darken and become more uniform. The wood species used in the RINGS collection are selected for their hardness, marking them suitable for use as flooring. However, wood flooring may still dent due to impacts, falling objects or concentrated loads that are not evenly distributed. While the surface treatment provides protective benefits, it does not prevent signs of daily wear from appearing over time.
complaints	The material must be tested on arrival. Any issues must be reported by registered mail within 8 days of receipt of the goods, and in any case prior to installation. Should any defects become evident during installation of the material, the purchaser must immediately suspend installation and inform Ceramiche Mutina, so that the appropriate investigations can be conducted. If the material is effectively found to be faulty, Ceramiche Mutina will only be obliged to collect and replace it.
maintenance	To keep the wood flooring in optimal condition, a number of precautions are recommended. •During the first months after installation, avoid covering the flooring with rugs or fabrics of any kind, so as to ensure natural, even oxidation. •Apply adhesive felt pads to the chair legs to prevent denting or scratching. Place doormats at the entrance to avoid bringing small stones or other objects indoors. •Periodically sweep or vacuum the floor to remove dust. •Clean the floors with water or neutral detergent for floors, using a damp cloth. •Do NOT under any circumstances use alkaline products such as ammonia or bleach, or solvents, such as alcohol or white spirit.

Technical features

STANDARD	FEATURES	VALUE REQUIRED	RINGS
UNI CEN/TS 15676:2008	slip resistance		*75*
UNI EN 13501-1:2019	Reaction to fire		Cfl-s1
UNI EN 717-1:2004	Formaldehyde emission		E1
Contents Pentachlorophenol	PCP		< 5 ppm

Packing

SIZE	PCS·SQM	PCS·BOX	SQM·BOX	BOX·PAL	KG·BOX	KG·PAL	SQM·PAL
17,5 x 17,5	32,65	16	0,49	64	5,6	358,40	31,36