

# PARADOX

## PORCELAIN


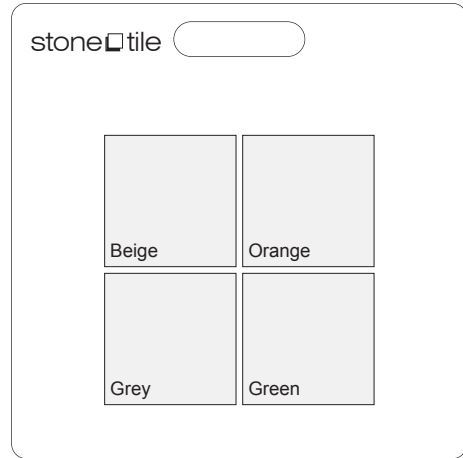


image of sample board face

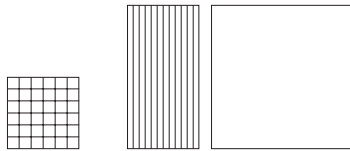

colour	mosaic	mosaic	60x60
<b>Beige</b>			
<b>Orange</b>			
<b>Green</b>			
<b>Grey</b>			

test	standard	req'd value	test result
usage			medium traffic
thickness			10mm
colour variation			great variation
joint width			min 2mm
dimensions & straightness	ISO 10545-2	various	conforms
water absorption	ISO 10545-3	<0.5%	<0.4%
bending strength	ISO 10545-4	>=1300N	>2200N
modulus of rupture	ISO 10545-4	>=35N/mm <sup>2</sup>	>45
surface hardness	ISO 10545-7		PEI 4
crazing resistance	ISO 10545-11		conforms
co. lin. thermal expansion	ISO 10545-8	<=9x10 <sup>-6</sup>	<=7x10 <sup>-6</sup>
thermal shock resistance	ISO 10545-9		conforms
frost resistance	ISO 10545-12		conforms
chemical resistance	ISO 10545-13		conforms
resistance to stains	ISO 10545-14	min Class 3	min Class 4
slip resistance	ASTM C1028	>0.6 (wet & dry)	wet >0.76 dry >0.89
pre-consumer recycled content			14.5%

trims & decors available	
mosaics	30x30
listello mosaics	30x60
battiscopa	8x60
battiscopa	8x45

1. These samples are for general reference only. Variations in dimension, veining, shade and colour may occur. Please do not remove samples from board. If full-size or loose samples are required, or to check stock quantities, contact Stone Tile or your sales rep.
2. Sizes noted are nominal and metric. Material may be supplied in a comparable, close imperial size. For exact sizes and thicknesses contact Stone Tile.
4. Special Order items may require a minimum order quantity.

stock item special order (allow 8-12 wks)

[www.stone-tile.com](http://www.stone-tile.com)

toronto 416-515-9000 calgary 403-234-7274  
vancouver 604-731-9948 new york 866-669-1103