MUTINA

Renga
by Vincent Van Duysen



EN

General information
Laying and maintenance tips
Colors
Technical features
Packing

Ceramiche Mutina Spa

Via del Crociale 25 41042 Fiorano Modenese, Italia
T +39 0536812800 F +39 0536812808
info@mutina.it – www.mutina.it


Divisione Contract
arch@mutina.it




General information

The data, information and indications contained in this technical data sheet and in further documents relating to the Renga by Vincent Van Duysen product are the exclusive property by Ceramiche MUTINA S.p.a. This Technical Data Sheet provides the buyer with information relating to the use of the product useful for its correct installation and evaluation and prevention of risks arising from the normal use of the same.

collection	Renga
design	Vincent Van Duysen, 2022
production	Artisanal
material	Glazed casting terracotta
nominal sizes	15xh25x15 cm (6”x10”x6”)
specification	– 3 colours: Ivory, Grey, Brown – Non structural artisanal partition elements – These elements must comply with the technical standards of construction regulation, applicable in the country where they are installed. For the Italian national territory, in particular, they should comply with standard NTC 2018 DECRETO MIN 27/01. – The product is suitable for indoor and outdoor areas complying with UNI EN 772-22 marked “F1-moderate exposure”

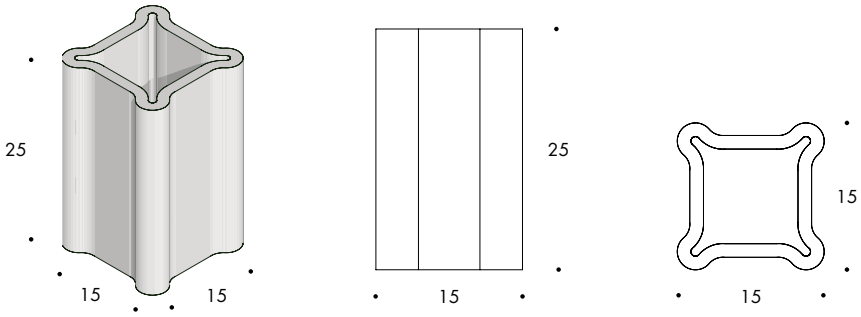

laying scheme

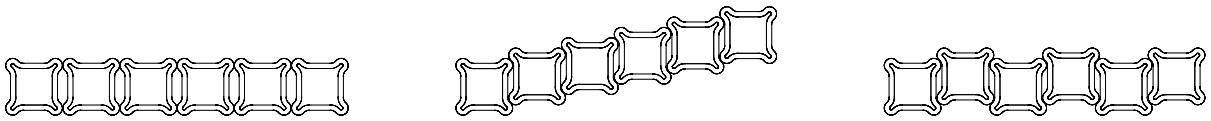

laying scheme 1
26,67 pcs / sqm

laying scheme 2
28,19 pcs / sqm

laying scheme 3
28,19 pcs / sqm

Laying and maintenance tips

use	Wall – indoor, outdoor.
installation	Insert a 50 mm wide “Murfor Compact” type reinforcing metal mesh between each horizontal row and along the entire length of the wall.
recommended adhesive	Solvents-free, eco-friendly organic adhesive produced by Kerakoll in exclusive for Mutina.
cleaning at the end of installation	Avoid drippings during installation. If needed the excess can be removed after the product has dried using a tool with a sharp edge.
general cleaning (installed tiles)	–
calibers (real size)	15 x 25 x 15 with a tolerance of 2 mm (artisanal product)

Colours



Ivory



Grey



Brown

Technical features

Non structural artisanal partition elements. These elements must in any case comply with the technical standards of construction regulation, applicable in the country where they are installed. For the Italian national territory, in particular, they should comply with standard NTC 2018 DECRETO MIN 27/01. This product is suitable for indoor and outdoor areas complying with UNI EN 722-22 marked "F1-moderate exposure"

STANDARD	FEATURES	VALUE REQUIRED	RENGA
UNI EN 772-16	dimensions	to declare	T2-R2
UNI EN 772-21:2011	water absorption	to declare	0,5%
UNI EN 772-5:2016	content of active soluble salts	to declare	S0
UNI EN CEN/TS 772- 22:2006	freeze-thaw resistance	to declare	F1
D.M. 1401/2008	determination of variable horizontal loads	to declare	C2
VOC Emission			
Declaration of Contents			
SDS			

Packing

SIZE	PCS·SQM	PCS·BOX	SQM·PAL	BOX·PAL	KG·PC	KG·PAL
15·25·15 cm	see laying scheme	2	*4,275*	*57*	8.30	*473,10*